

SIGRATHERM® Soft Felt

Grade GFA

Material:

Graphite soft felt


Application:

High-temperature insulation

Typical properties of SIGRATHERM® GFA

Type	Unit	GFA5	GFA10
Thickness	mm	6	11.5
Area weight	g/m ²	500	1,000
Width	mm (inch)	1,220 (48")	
Length	m	25 – 30	
Ash content	ppm	400	
Ash content (purified grade)	ppm	< 30	
Max. application temperature	°C	2,000 inert gas atmosphere 2,000 vacuum	

Thermal conductivity of SIGRATHERM® GFA (inert atmosphere)

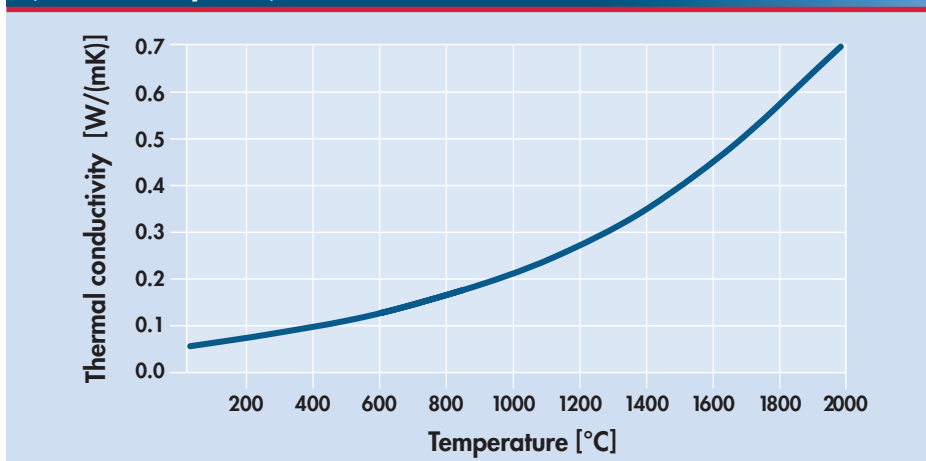

TDS GFA.01

® registered trademark of SGL CARBON SE

02 2013/0 1NÄ Printed in Germany

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".

Graphite Specialties | SGL CARBON GmbH

Sales Europe | felt-europe@sglgroup.com

Sales Americas | felt-americas@sglgroup.com

Sales Asia | felt-asia@sglgroup.com

www.graphitespecialties.com | www.sglgroup.com

Broad Base. Best Solutions.

